

# Computational Intelligence

Winter Term 2020/21

Prof. Dr. Günter Rudolph

Lehrstuhl für Algorithm Engineering (LS 11)

Fakultät für Informatik

TU Dortmund

- Introduction to Artificial Neural Networks
  - McCulloch Pitts Neuron (MCP)
  - Minsky / Papert Perceptron (MPP)


## Introduction to Artificial Neural Networks

## Lecture 09

### Biological Prototype

- Neuron
  - Information gathering (D)
  - Information processing (C)
  - Information propagation (A / S)


human being:  $10^{12}$  neurons  
electricity in mV range  
speed: 120 m / s

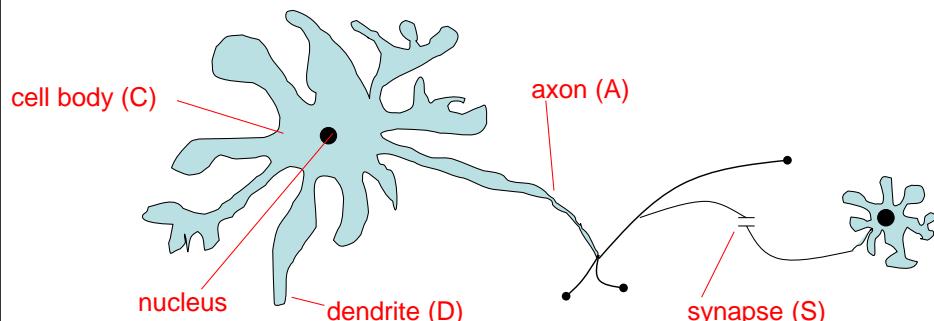


## Introduction to Artificial Neural Networks

## Lecture 09

### Abstraction

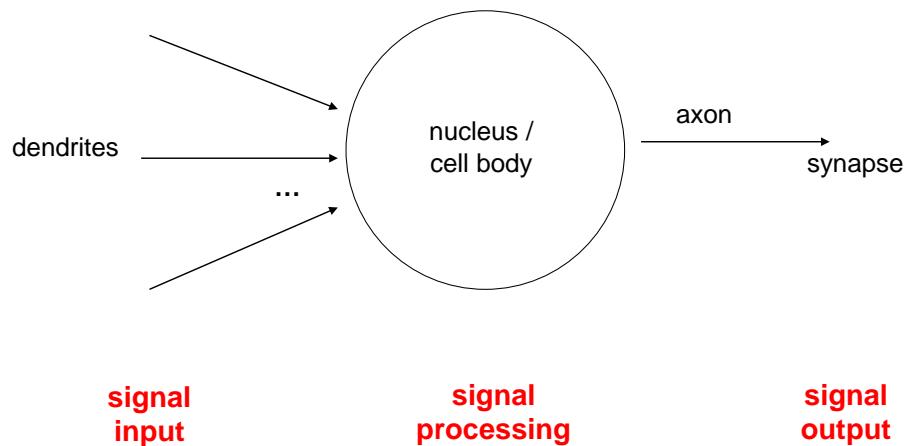

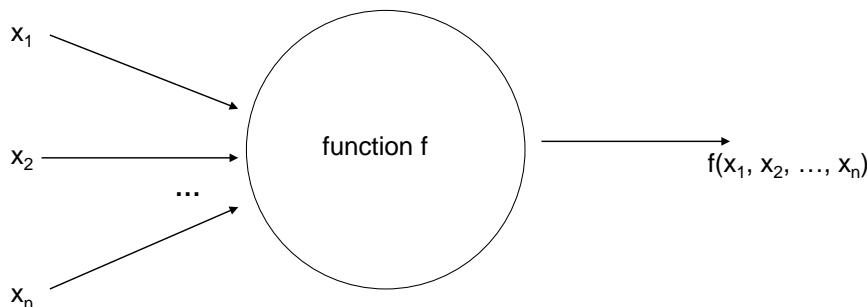
**Model****McCulloch-Pitts-Neuron**

n binary input signals  $x_1, \dots, x_n$

threshold  $\theta > 0$

$$f(x_1, \dots, x_n) = \begin{cases} 1 & \text{if } \sum_{i=1}^n x_i \geq \theta \\ 0 & \text{else} \end{cases}$$

⇒ can be realized:  
**boolean OR**



**boolean AND**

$\theta = n$

**1943: Warren McCulloch / Walter Pitts**

- description of neurological networks  
→ modell: McCulloch-Pitts-Neuron (MCP)

- basic idea:
  - neuron is either active or inactive
  - skills result from **connecting** neurons

- considered static networks  
(i.e. connections had been constructed and not learnt)


**McCulloch-Pitts-Neuron**

n binary input signals  $x_1, \dots, x_n$

threshold  $\theta > 0$

in addition: m binary inhibitory signals  $y_1, \dots, y_m$


$$\tilde{f}(x_1, \dots, x_n; y_1, \dots, y_m) = f(x_1, \dots, x_n) \cdot \prod_{j=1}^m (1 - y_j)$$



- if at least one  $y_j = 1$ , then output = 0
- otherwise:
  - sum of inputs  $\geq$  threshold, then output = 1
  - else output = 0



**Assumption:**

inputs also available in inverted form, i.e.  $\exists$  inverted inputs.

**Theorem:**

Every logical function  $F: B^n \rightarrow B$  can be simulated with a two-layered McCulloch/Pitts net.

**Example:**  $F(x) = x_1 x_2 \bar{x}_3 \vee \bar{x}_1 \bar{x}_2 \bar{x}_3 \vee x_1 \bar{x}_4$

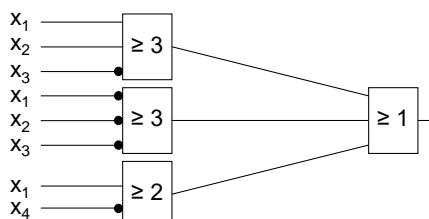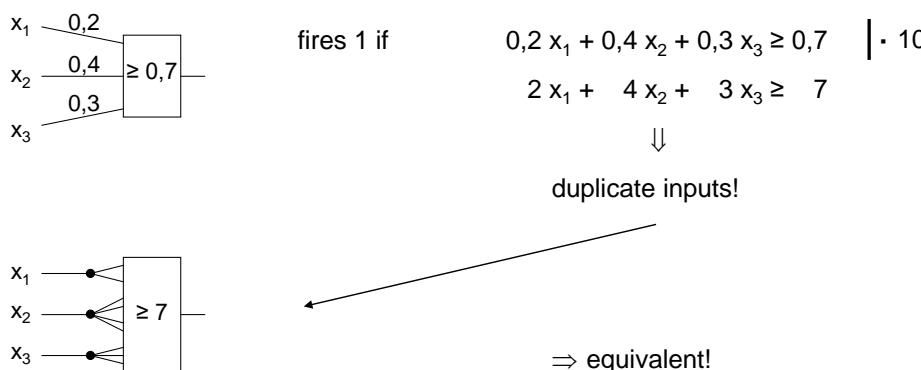**Generalization:** inputs with weights**Proof:** (by construction)

Every boolean function  $F$  can be transformed in disjunctive normal form  
 $\Rightarrow$  2 layers (AND - OR)

1. Every clause gets a decoding neuron with  $\theta = n$   
 $\Rightarrow$  output = 1 only if clause satisfied (AND gate)
2. All outputs of decoding neurons  
 are inputs of a neuron with  $\theta = 1$  (OR gate)

q.e.d.

**Theorem:**

Weighted and unweighted MCP-nets are equivalent for weights  $\in \mathbb{Q}^+$ .

**Proof:**

$\Rightarrow$  Let  $\sum_{i=1}^n \frac{a_i}{b_i} x_i \geq \frac{a_0}{b_0}$  with  $a_i, b_i \in \mathbb{N}$

Multiplication with  $\prod_{i=0}^n b_i$  yields inequality with coefficients in  $\mathbb{N}$

Duplicate input  $x_i$ , such that we get  $a_0 b_1 b_2 \dots b_{i-1} b_{i+1} \dots b_n$  inputs.

Threshold  $\theta = a_0 b_1 \dots b_n$

$\Leftarrow$

Set all weights to 1.

q.e.d.

**Conclusion for MCP nets:**

- + feed-forward: able to compute any Boolean function
- + recursive: able to simulate DFA (deterministic finite automaton)
- very similar to conventional logical circuits
- difficult to construct
- no good learning algorithm available

**Perceptron (Rosenblatt 1958)**

- complex model → reduced by Minsky & Papert to what is „necessary“
- Minsky-Papert perceptron (MPP), 1969 → essential difference:  $x \in [0,1] \subset \mathbb{R}$

**What can a single MPP do?**

$$w_1 x_1 + w_2 x_2 \geq \theta$$




isolation of  $x_2$  yields:

$$x_2 \geq \frac{\theta}{w_2} - \frac{w_1}{w_2} x_1$$


**Example:**

$$0,9 x_1 + 0,8 x_2 \geq 0,6$$

$$\Leftrightarrow x_2 \geq \frac{3}{4} - \frac{9}{8} x_1$$

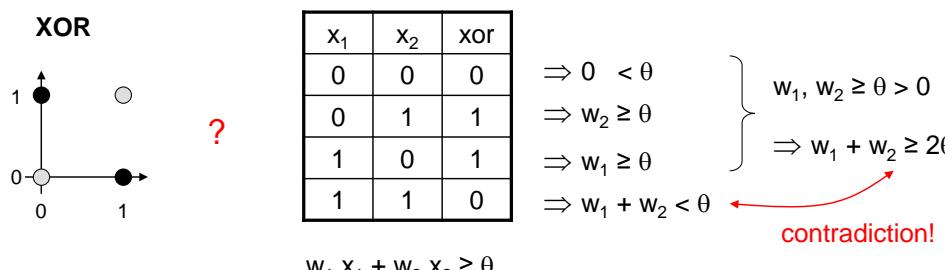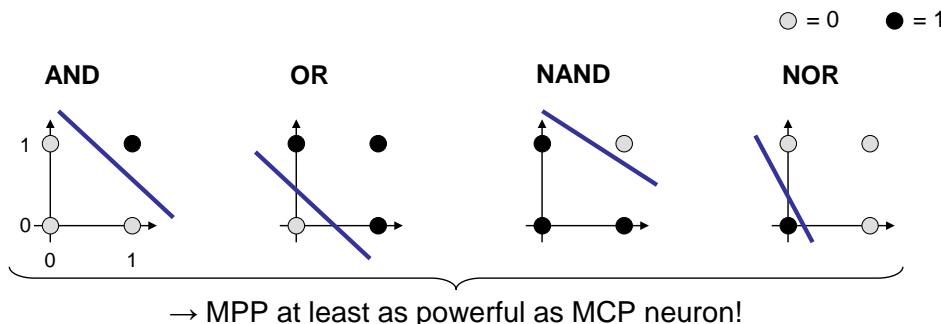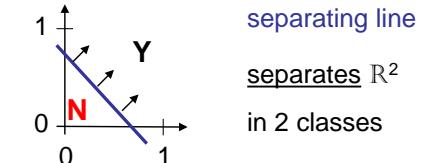
**1969: Marvin Minsky / Seymour Papert**

- book *Perceptrons* → analysis math. properties of perceptrons
- disillusioning result:  
**perceptions fail to solve a number of trivial problems!**
  - XOR Problem
  - Parity Problem
  - Connectivity Problem
- “conclusion”: all artificial neurons have this kind of weakness!  
⇒ research in this field is a scientific dead end!
- consequence: research funding for ANN cut down extremely (~ 15 years)

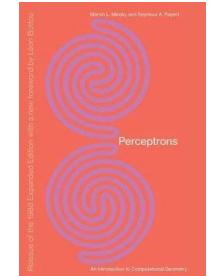


how to leave the „dead end“:

1. Multilayer Perceptrons:

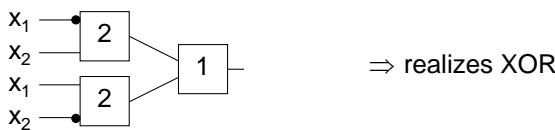

2. Nonlinear separating functions:

**XOR**       $g(x_1, x_2) = 2x_1 + 2x_2 - 4x_1x_2 - 1$       with       $\theta = 0$

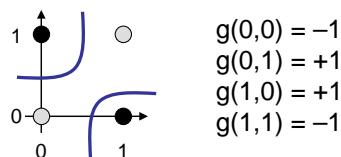


**Perceptron Learning**

Assumption: test examples with correct I/O behavior available

**Principle:**

- (1) choose initial weights in arbitrary manner
- (2) feed in test pattern
- (3) if output of perceptron wrong, then change weights
- (4) goto (2) until correct output for all test patterns

**graphically:**



→ translation and rotation of separating lines

How to obtain weights  $w_i$  and threshold  $\theta$ ?

as yet: by construction

example: NAND-gate

$x_1$	$x_2$	NAND
0	0	1
0	1	1
1	0	1
1	1	0

$$\begin{aligned} &\Rightarrow 0 \geq \theta \\ &\Rightarrow w_2 \geq \theta \\ &\Rightarrow w_1 \geq \theta \\ &\Rightarrow w_1 + w_2 < \theta \end{aligned}$$

} requires solution of a system of linear inequalities ( $\in P$ )  
(e.g.:  $w_1 = w_2 = -2, \theta = -3$ )

now: by „learning“ / training


**Perceptron Learning**

Assumption: test examples with correct I/O behavior available

**Principle:**


- (1) choose initial weights in arbitrary manner
- (2) feed in test pattern
- (3) if output of perceptron wrong, then change weights
- (4) goto (2) until correct output for all test patterns

**graphically:**



→ translation and rotation of separating lines

**Example**



$$P = \left\{ \begin{pmatrix} 1 \\ 1 \end{pmatrix}, \begin{pmatrix} 1 \\ -1 \end{pmatrix}, \begin{pmatrix} 0 \\ -1 \end{pmatrix} \right\}$$

$$N = \left\{ \begin{pmatrix} -1 \\ -1 \end{pmatrix}, \begin{pmatrix} -1 \\ 1 \end{pmatrix}, \begin{pmatrix} 0 \\ 1 \end{pmatrix} \right\}$$

threshold as a weight:  $w = (\theta, w_1, w_2)'$



$$P = \left\{ \begin{pmatrix} 1 \\ 1 \\ 1 \end{pmatrix}, \begin{pmatrix} 1 \\ 1 \\ -1 \end{pmatrix}, \begin{pmatrix} 1 \\ 0 \\ -1 \end{pmatrix} \right\}$$

$$N = \left\{ \begin{pmatrix} -1 \\ -1 \\ -1 \end{pmatrix}, \begin{pmatrix} -1 \\ -1 \\ 1 \end{pmatrix}, \begin{pmatrix} 0 \\ 0 \\ 1 \end{pmatrix} \right\}$$

$$\begin{array}{l} \frac{1}{w_0} \frac{-\theta}{w_1} \frac{x_1}{w_1} \frac{+ \frac{x_2}{w_2}}{\geq 0} \\ \hline w_1x_1 + w_2x_2 \geq \theta \Leftrightarrow w_1x_1 + w_2x_2 - \theta \cdot 1 \geq 0 \\ \quad \quad \quad w_0 \quad x_0 \end{array}$$

⇒ separating hyperplane:

$$H(w) = \{x : h(x; w) = 0\}$$

where

$$h(x; w) = w'x = w_0x_0 + w_1x_1 + \dots + w_nx_n$$

⇒ origin  $0 \in H(w)$  since  $h(0; w) = 0$

**Perceptron Learning**

1. choose  $w_0$  at random,  $t = 0$
2. choose arbitrary  $x \in P \cup N$
3. if  $x \in P$  and  $w_t'x > 0$  then **goto 2**  
if  $x \in N$  and  $w_t'x \leq 0$  then **goto 2**
4. if  $x \in P$  and  $w_t'x \leq 0$  then  
 $w_{t+1} = w_t + x$ ;  $t++$ ; **goto 2**
5. if  $x \in N$  and  $w_t'x > 0$  then  
 $w_{t+1} = w_t - x$ ;  $t++$ ; **goto 2**
6. stop? If I/O correct for all examples!

**remark:** if separating  $H(w^*)$  exists, then algorithm converges, is finite (but in worst case: exponential runtime)


P: set of positive examples  
N: set of negative examples  
threshold  $\theta$  integrated in weights

→ output 1  
→ output 0

I/O correct!

let  $w'x \leq 0$ , should be  $> 0$ !  
 $(w+x)'x = w'x + x'x > w'x$

let  $w'x > 0$ , should be  $\leq 0$ !  
 $(w-x)'x = w'x - x'x < w'x$

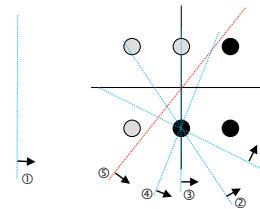**Example**

suppose initial vector of weights is

$$w^{(0)} = (1, \frac{1}{2}, 1)'$$

```
> w = SPL(m,c(1,0.5,1))
[1] 1.0 0.5 1.0
[1] 2.0 0.5 0.0
[1] 1.0 1.5 1.0
[1] 0.0 2.5 0.0
[1] -1.0 2.5 -1.0
[1] 0.0 2.5 -2.0
```

**Single-Layer Perceptron (SLP)****Acceleration of Perceptron Learning**

Assumption:  $x \in \{0, 1\}^n \Rightarrow \|x\| = \sum_{i=1}^n |x_i| \geq 1$  for all  $x \neq (0, \dots, 0)'$

Let  $B = P \cup \{-x : x \in N\}$  (only positive examples)

If classification incorrect, then  $w'x < 0$ .

Consequently, size of error is just  $\delta = -w'x > 0$ .

$\Rightarrow w_{t+1} = w_t + (\delta + \varepsilon)x$  for  $\varepsilon > 0$  (small) corrects error in a single step, since

$$\begin{aligned} w'_{t+1}x &= (w_t + (\delta + \varepsilon)x)'x \\ &= \underbrace{w'_t x}_{\geq 0} + (\delta + \varepsilon)x'x \\ &= -\delta + \delta \|x\|^2 + \varepsilon \|x\|^2 \\ &= \delta (\|x\|^2 - 1) + \varepsilon \|x\|^2 > 0 \quad \checkmark \\ &\quad \underbrace{\geq 0}_{> 0} \end{aligned}$$

```
SPL <- function(m,w) {
  print(w)
  repeat {
    OK <- TRUE
    for (i in 1:nrow(m)) {
      x <- m[i,]
      s <- x[1]*w[1]+x[2]*w[2]+x[3]*w[3]
      if (s <= 0) {
        OK <- FALSE
        w <- w + x
        print(w) # show every change
      }
      if (OK) break;
    }
    return(w)
  }

m <- matrix( # only positive examples
  c(c(1,1,1),c(1,1,-1),c(1,0,-1),
    c(-1,1,1),c(-1,1,-1),c(-1,0,-1)),
  nrow=6,byrow=TRUE)
```

**Single-Layer Perceptron (SLP)****Generalization:**

Assumption:  $x \in \mathbb{R}^n \Rightarrow \|x\| > 0$  for all  $x \neq (0, \dots, 0)'$

as before:  $w_{t+1} = w_t + (\delta + \varepsilon)x$  for  $\varepsilon > 0$  (small) and  $\delta = -w_t'x > 0$

$$\Rightarrow w'_{t+1}x = \delta (\|x\|^2 - 1) + \varepsilon \|x\|^2$$

$\underbrace{\phantom{\delta}}_{< 0 \text{ possible!}} \underbrace{\phantom{\varepsilon}}_{> 0}$

Claim: Scaling of data does not alter classification task (if threshold 0)!

Let  $\ell = \min \{ \|x\| : x \in B \} > 0$

Set  $\hat{x} = \frac{x}{\ell}$  ⇒ set of scaled examples  $\hat{B}$

$$\Rightarrow \|\hat{x}\| \geq 1 \Rightarrow \|\hat{x}\|^2 - 1 \geq 0 \Rightarrow w'_{t+1} \hat{x} > 0 \quad \checkmark$$

**Theorem:**

Let  $X = P \cup N$  with  $P \cap N = \emptyset$  be training patterns (P: positive; N: negative examples). Suppose training patterns are embedded in  $\mathbb{R}^{n+1}$  with threshold 0 and origin  $0 \notin X$ .

If separating hyperplane  $H(w)$  exists,  
then scaling of data does not alter classification task!

**Proof:**

Suppose  $\exists x \in P \cup N$  with  $\|x\| < 1$  and let  $\ell = \min\{\|x\| : x \in P \cup N\} > 0$ .

Set  $\hat{x} = \frac{1}{\ell}x$  so that  $\hat{P} = \{\frac{x}{\ell} : x \in P\}$  and  $\hat{N} = \{\frac{x}{\ell} : x \in N\}$ .

Suppose  $\exists w$  with  $\forall \hat{x} \in \hat{P} : w'\hat{x} > 0$  and  $\forall \hat{x} \in \hat{N} : w'\hat{x} \leq 0$ .

Then holds:

$$w'\hat{x} > 0 \Leftrightarrow w'\frac{x}{\ell} > 0 \Leftrightarrow w'x > 0$$

$$w'\hat{x} \leq 0 \Leftrightarrow w'\frac{x}{\ell} \leq 0 \Leftrightarrow w'x \leq 0$$

q.e.d.

**as yet:** *Online Learning*

→ Update of weights after each training pattern (if necessary)

**now:** *Batch Learning*

→ Update of weights only after test of all training patterns

→ Update rule:

$$w_{t+1} = w_t + \gamma \sum_{\substack{w_t'x < 0 \\ x \in B}} x \quad (\gamma > 0)$$

vague assessment in literature:

- advantage : „usually faster“

- disadvantage : „needs more memory“ ← just a single vector!

There exist numerous variants of Perceptron Learning Methods.

**Theorem:** (Duda & Hart 1973)

If rule for correcting weights is  $w_{t+1} = w_t + \gamma_t x$  (i.e., if  $w_t'x < 0$ ) and

$$1. \forall t \geq 0 : \gamma_t \geq 0$$

$$2. \sum_{t=0}^{\infty} \gamma_t = \infty$$

$$3. \lim_{m \rightarrow \infty} \frac{\sum_{t=0}^m \gamma_t^2}{\left(\sum_{t=0}^m \gamma_t\right)^2} = 0$$

then  $w_t \rightarrow w^*$  for  $t \rightarrow \infty$  with  $\forall x: x'w^* > 0$ . ■

e.g.:  $\gamma_t = \gamma > 0$  or  $\gamma_t = \gamma / (t+1)$  for  $\gamma > 0$

**as yet:** *Online Learning*

→ Update of weights after each training pattern (if necessary)

**now:** *Batch Learning*

→ Update of weights only after test of all training patterns

→ Update rule:

$$w_{t+1} = w_t - \gamma \nabla f(w_t) \quad (\gamma > 0)$$

**find weights by means of optimization**

Let  $F(w) = \{x \in B : w'x < 0\}$  be the set of patterns incorrectly classified by weight  $w$ .

Objective function:  $f(w) = -\sum_{x \in F(w)} w'x \rightarrow \min!$

Optimum:  $f(w) = 0$  iff  $F(w)$  is empty

Possible approach: gradient method

$$w_{t+1} = w_t - \gamma \nabla f(w_t) \quad (\gamma > 0)$$

converges to a local minimum (dep. on  $w_0$ )

**Gradient method**

$$\mathbf{w}_{t+1} = \mathbf{w}_t - \gamma \nabla f(\mathbf{w}_t)$$

Gradient points in direction of steepest ascent of function  $f(\cdot)$

$$\text{Gradient } \nabla f(\mathbf{w}) = \left( \frac{\partial f(\mathbf{w})}{\partial w_1}, \frac{\partial f(\mathbf{w})}{\partial w_2}, \dots, \frac{\partial f(\mathbf{w})}{\partial w_n} \right)'$$

$$\frac{\partial f(\mathbf{w})}{\partial w_i} = -\frac{\partial}{\partial w_i} \sum_{x \in F(w)} \mathbf{w}' \mathbf{x} = -\frac{\partial}{\partial w_i} \sum_{x \in F(w)} \sum_{j=1}^n w_j \cdot x_j$$

$$= -\sum_{x \in F(w)} \underbrace{\frac{\partial}{\partial w_i} \left( \sum_{j=1}^n w_j \cdot x_j \right)}_{x_i} = -\sum_{x \in F(w)} x_i$$

**Caution:**  
Indices  $i$  of  $w_i$  here denote components of vector  $\mathbf{w}$ ; they are **not** the iteration counters!

**How difficult is it**

- (a) to find a separating hyperplane, provided it exists?
- (b) to decide, that there is no separating hyperplane?

Let  $B = P \cup \{-x : x \in N\}$  (only positive examples),  $w_i \in \mathbb{R}$ ,  $\theta \in \mathbb{R}$ ,  $|B| = m$

For every example  $x_i \in B$  should hold:

$$x_{i1} w_1 + x_{i2} w_2 + \dots + x_{in} w_n \geq \theta \rightarrow \text{trivial solution } w_i = \theta = 0 \text{ to be excluded!}$$

Therefore additionally:  $\eta \in \mathbb{R}$

$$x_{i1} w_1 + x_{i2} w_2 + \dots + x_{in} w_n - \theta - \eta \geq 0$$

**Idea:**  $\eta$  maximize  $\rightarrow$  if  $\eta^* > 0$ , then solution found

**Gradient method**

thus:

$$\text{gradient } \nabla f(\mathbf{w}) = \left( \frac{\partial f(\mathbf{w})}{\partial w_1}, \frac{\partial f(\mathbf{w})}{\partial w_2}, \dots, \frac{\partial f(\mathbf{w})}{\partial w_n} \right)'$$

$$= \left( -\sum_{x \in F(w)} x_1, -\sum_{x \in F(w)} x_2, \dots, -\sum_{x \in F(w)} x_n \right)'$$

$$= -\sum_{x \in F(w)} x$$

$$\Rightarrow \mathbf{w}_{t+1} = \mathbf{w}_t + \gamma \sum_{x \in F(w_t)} x$$

gradient method  $\Leftrightarrow$  batch learning

**How difficult is it**

- (a) to find a separating hyperplane, provided it exists?
- (b) to decide, that there is no separating hyperplane?

Let  $B = P \cup \{-x : x \in N\}$  (only positive examples),  $w_i \in \mathbb{R}$ ,  $\theta \in \mathbb{R}$ ,  $|B| = m$

For every example  $x_i \in B$  should hold:

$$x_{i1} w_1 + x_{i2} w_2 + \dots + x_{in} w_n \geq \theta \rightarrow \text{trivial solution } w_i = \theta = 0 \text{ to be excluded!}$$

Therefore additionally:  $\eta \in \mathbb{R}$

$$x_{i1} w_1 + x_{i2} w_2 + \dots + x_{in} w_n - \theta - \eta \geq 0$$

**Idea:**  $\eta$  maximize  $\rightarrow$  if  $\eta^* > 0$ , then solution found

Matrix notation:

$$A = \begin{pmatrix} x'_1 & -1 & -1 \\ x'_2 & -1 & -1 \\ \vdots & \vdots & \vdots \\ x'_m & -1 & -1 \end{pmatrix} \quad z = \begin{pmatrix} w \\ \theta \\ \eta \end{pmatrix}$$

**Linear Programming Problem:**

$$f(z_1, z_2, \dots, z_n, z_{n+1}, z_{n+2}) = z_{n+2} \rightarrow \max!$$

$$\text{s.t. } Az \geq 0$$

} calculated by e.g. Kamarkar-algorithm in **polynomial time**

If  $z_{n+2} = \eta > 0$ , then weights and threshold are given by  $z$ .

Otherwise separating hyperplane does not exist!